

TRADITIONAL FLOATING SYSTEM WITH AIR FLOW

A Traditional Floating System with Increased Air Flow.

- Increased subfloor venting capabilities
 Mechanical exhaust system optional (MagnaVent)
- Uniform performance and ball rebound
- Ideal for areas with moisture concerns
- Multiple resilience options
- Available with 100% FSC maple and subfloor



Horner MFMA Maple 2 layers 1" x 6" SPF subfloor laid at angle 1/4" or 1/2" blanket foam pad (optional resilient pad)

Variable air flow spacing

LEED Options Available



Ideal for facilities with moisture concerns. Traditional baskeball floor performance and multipurpose functions.

PERFORMANCE

System options provide variable performance characteristics

PERFORMANCE CHARACTERISTICS

Shock Absorption	 ✓
Vertical Deflection	 ✓
Area of Deflection	(✓)*
Ball Bounce	 ✓
Surface Friction (Coefficient of Friction/Sliding Coefficient) 🖌	
Rolling Load	 ✓
*available in Allwood LP Version	

SPECIFICATIONS

System Thickness*/Pad Options ²⁵/₃₂" MFMA Horner Maple:

- 2 ¹/₂" Floor using ¹/₄" blanket foam underlayment

 - 2 ³/₄" Floor using ¹/₂" blanket foam underlayment
 - 2 ¹¹/₁₆" Floor using ⁷/₁₆" SAFE or ECO Pad
- ³³/₃₂" MFMA Horner Maple: Add ¹/₄"
 *System Thickness is equivalent to slab depression for new facilities.

MATERIALS

Option: Specify Horner LongLife⁻ Maple Subfloor: 2 layers 1" x 6" SPF #2 subfloor Option: ¹/₂" x 6 SPF #2 subfloor ¹/₄" closed cell blanket foam underlayment Options: ¹/₂" closed cell blanket foam for added resilience, ³/₄" SAfe pad, ⁷/₁₆" SAFE Pad or ⁷/₁₆" ECD Pad MagnaVent exhaust system (see word document) Vapor retarder

GREEN/LEED OPTIONS

FSC Maple Flooring FSC Subfloor Components ECO Pads - recycled


MRc 7 ts MRc 7 Exemplary Performance MRc 4.1 & MRc 4.2

INSTALLATION REFERENCES

Wind River Elementary School, Pavillion, WY Shaw High School, East Cleveland, OH Interlochan Arts Academy, Traverse City, MI Holdrum Middle School, Rivervale, NJ

> Please contact us regarding our <u>extended</u> maintenance warranty options.

Horner Flooring Company's policy is to continuously improve its line of products. Therefore, Horner Flooring Company reserves the right to change, modify or discontinue models, specifications and accessories of all products at any time without notice or obligation to any purchaser.

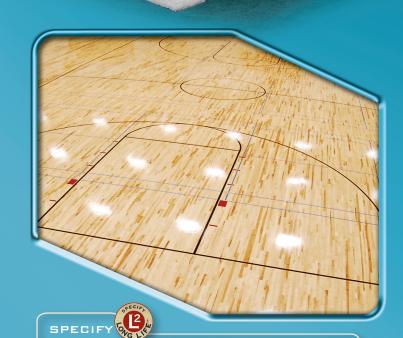

For extended wear life, choose *Long Life*[™]. Horner's *Long Life*[™] flooring is 25/32" northern hard maple with the same wear depth as 33/32" flooring. *Long Life*[™] provides the ecological, cost savings and availability benefits of a 25/32" floor, with extended wear life. More re-sands, stronger system and economical. Why not value engineer?

HORNER FLOORING *is the leading manufacturer* of athletic flooring systems used in high-school gyms, college and professional arenas, and public and private training facilities.





HORNER FLOORING COMPANY, INC. 800.380.0119 / www.hornerflooring.com

P.O. Box 380, 23400 Hellman Avenue, Dollar Bay, MI 49922 P: 906.482.1180 / F: 906.482.6115 / info@hornerflooring.com