



Traditional field houses, gymnasiums, aerobic and dance floors, high performance and competition facilities

PERFORMANCE

Tested in accordance DIN18032-Part II / EN 1490-2006

PERFORMANCE CHARACTERISTICS

Shock Absorption	V
Vertical Deflection	
Area of Deflection	V
Ball Bounce	V
Surface Friction (Coefficient of Friction/Sliding Co	pefficient) 🗸
Rolling Load	V

SPECIFICATIONS

System Thickness*/Pad Options 25/32" MFMA Horner Maple: 1 3/4" Floor using 1/4" foam pad and 3/8" rated sheathing □ 33/32" MFMA Horner Maple: Add 1/4" *System Thickness is equivalent to slab depression for new facilities.

MATERIALS

Option: Specify Horner LongLife Maple Subfloor: Rated sheathing Optional closed-cell foam pad Modified steel drive pin anchors Vapor retarder

GREEN/LEED OPTIONS

FSC Maple Flooring MRc 7 **FSC Subfloor Components** MRc 7 Exemplary Performance


INSTALLATION REFERENCES

New Kent High School, New Kent, VA Paonia High School, Paonia, CO U.S. Basketball Association, Louisville, KY Dumars Residence, Bingham Farms, MI Greenbriar, White Sulphur Springs, WV

> Please contact us regarding our extended maintenance warranty options.

Horner Flooring Company's policy is to continuously improve its line of products. Therefore, Horner Flooring Company reserves the right to change, modify or discontinue models, specifications and accessories of all products at any time without notice or obligation to any purchaser.



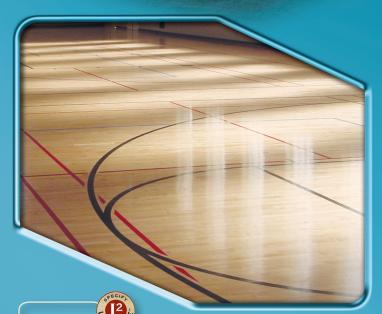

For extended wear life, choose **Long Life**TM. Horner's **Long Life**TM 33/32" flooring. **Long Life™** provides the ecological, cost savings and

HORNER FLOORING is the leading manufacturer







HORNER FLOORING COMPANY, INC. 800.380.0119 / www.hornerflooring.com

P.O. Box 380, 23400 Hellman Avenue, Dollar Bay, MI 49922 P: 906.482.1180 / F: 906.482.6115 / info@hornerflooring.com